

# nifty

# 170

## TRAILER MOUNTED ACCESS PLATFORM



**56ft 1in (17.10m)**

Working height

**28ft 6in (8.70m)**

Working outreach

### Telescopic Upper Boom

Greater accuracy when  
positioning platform

### Hydraulic Outriggers

For quick & easy setup

### Fully Proportional Hydraulic Controls

Simple, reliable &  
easy to maintain

### Bi-Energy Available

Optimising utilisation




niftylift.com

# nifty 170

With one of the largest working envelopes in its class the Nifty 170 delivers maximum reach with stability and control. Octagonal boom sections provide strength without compromising on weight and the telescopic upper boom improves accuracy when positioning the platform. Hydraulically operated outriggers and controls make setting up and operating quick and easy, especially on uneven surfaces.

## SAFETY FEATURES

- Pressure Sensitive Outriggers
- Audible and Visible Alarms
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Gas Spring Hand Brake
- Dual Harness Points
- CE Marked

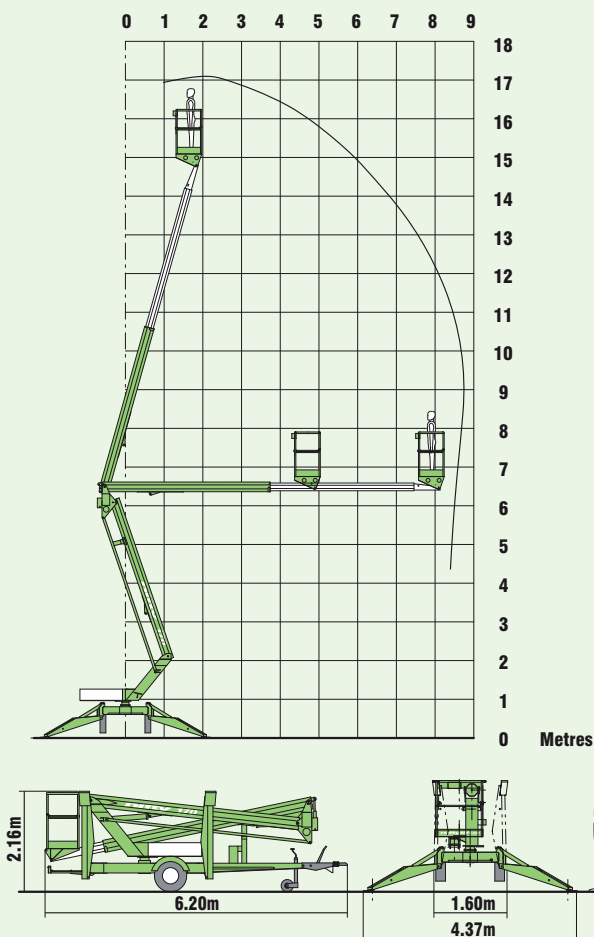

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.



The 170's outstanding reach makes it ideal for a wide range of applications.



Also available on a self-drivable 2x4 or 4x4 base, the Nifty 170SD.



Fully proportional hydraulic outriggers make setting up and levelling quick and easy even on gradients.


## SPECIFICATIONS

<b>Working Height</b>	17.10m	56ft 1in
<b>Platform Height</b>	15.10m	49ft 6in
<b>Working Outreach</b>	8.70m	28ft 6in
<b>Slew</b>	360°	
<b>Width - Travelling</b>	1.60m	5ft 3in
<b>- Working</b>	4.37m	14ft 4in
<b>Height - Overall</b>	2.16m	7ft 1in
<b>Length - Overall</b>	6.20m	20ft 4in
<b>Weight</b>	1,900kg - 2,000kg*	4,180lbs - 4,400lbs*
<b>Platform Rotation**</b>	100°	
<b>Platform Capacity</b>	200kg	4400lbs
<b>Platform Size</b>	1.10m x 0.65m	3ft 8in x 2ft 1in
<b>Control System</b>	Fully Proportional Hydraulic	
<b>Power System</b>	Mains Only Battery Only Gas or Diesel Only Bi-Energy (engine & battery)	
<b>Drive Option</b>	Traction Drive	

\* Weights may vary according to specification / power options, please confirm before ordering.

\*\* Option Available on request.

Supplied by:

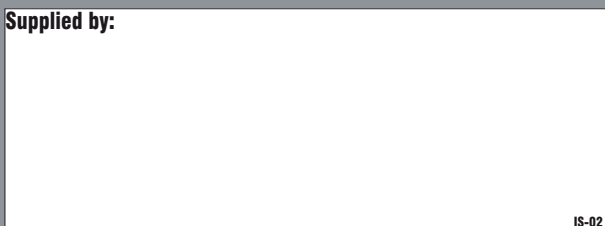

IS-02

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.



**NIFTYLIFT LTD**  
Fingle Drive  
Stonebridge  
Milton Keynes  
MK13 0ER  
England

[www.niftylift.com](http://www.niftylift.com)

e-mail: [info@niftylift.com](mailto:info@niftylift.com)  
Tel.: +44 (0) 1908 223456  
Fax.: +44 (0) 1908 312733